




LG optimus L90 Midframe Replacement

Replace the midframe of the LG Optimus L90.

Written By: Alex Arruda

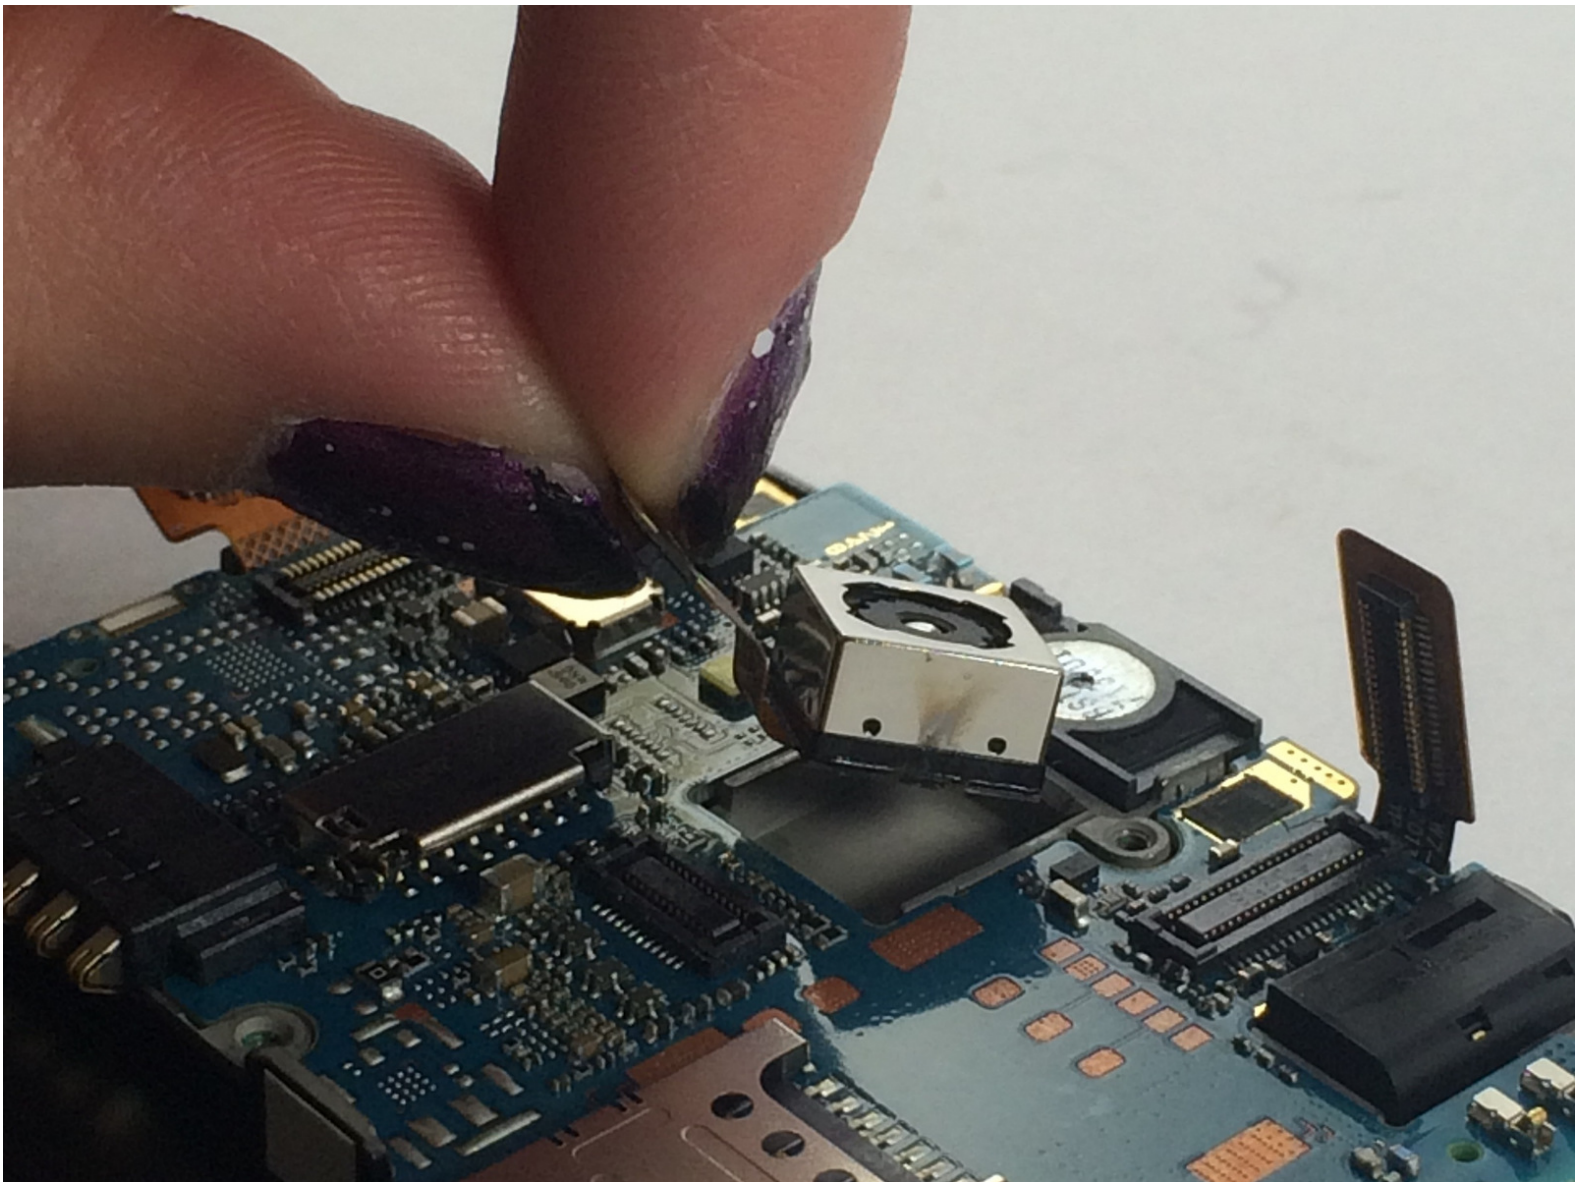

INTRODUCTION


This guide will show you how to replace the midframe of the LG Optimus L90 or remove it to access the phone's internal components.



TOOLS:

- [iFixit Opening Picks set of 6](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery

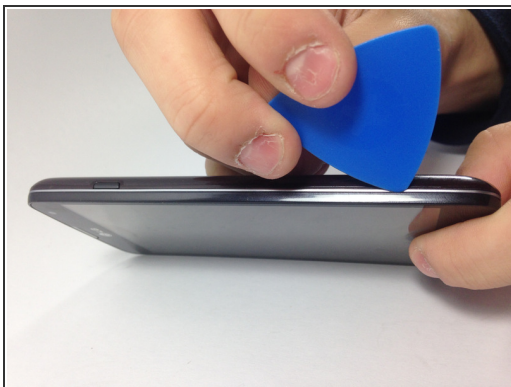


- Carefully slide an opening pick between the the rear cover and the body of the phone.
- Using the pick, separate the cover from the back of the phone.
- Remove the rear cover.

Step 2





- Insert a plastic opening tool into the small recess at the bottom of the battery.
- Use the plastic opening tool to lift up the bottom of the battery.
- Remove the battery from the phone.

Step 3 — Midframe

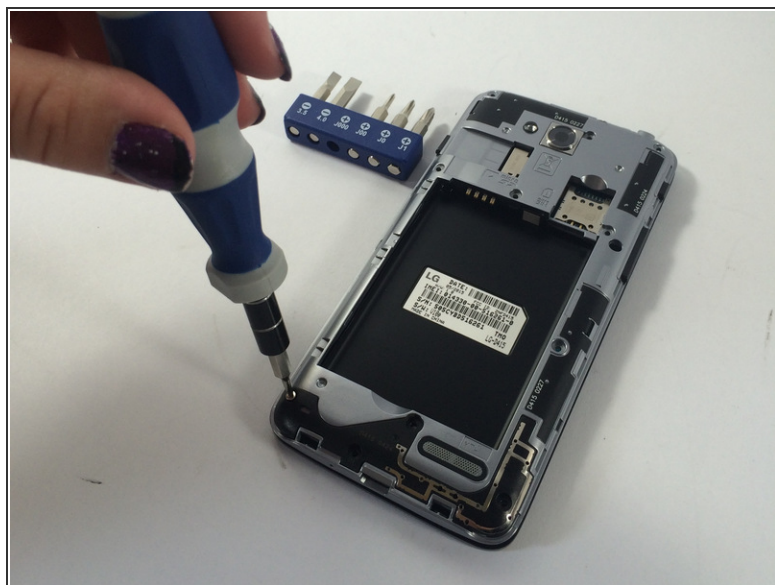

- Remove the eleven JIS #000 screws securing the midframe to the phone.

Step 4

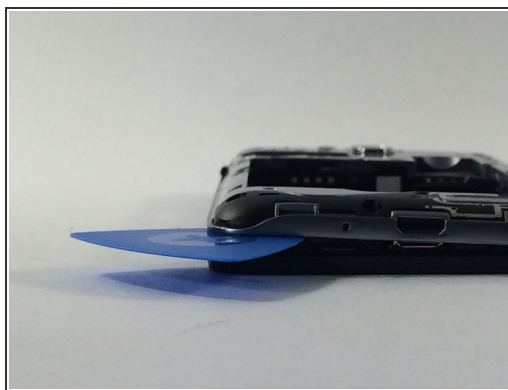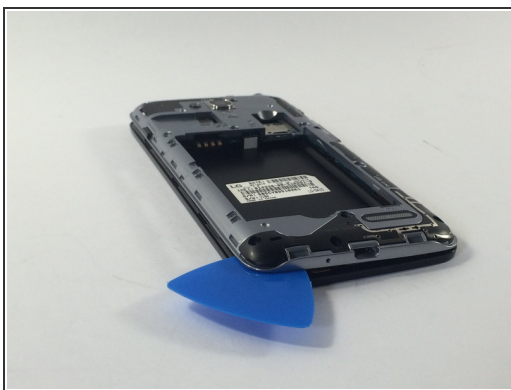

- Using an opening pick, carefully separate the midframe from the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 09:37:51 PM.